



LED PANEL LAMP



Model	CCT(K)	Power(W)	Flux(lm)	Efficiency (lm/W)	Illuminance (lux@1m)	CRI	Power Factor
ELF50AWD	3,000	50	3,900	78	1,410	75 Ra	Over 0.95
ELF50ADD	5,800	50	4,000	80	1,500	75 Ra	Over 0.95
ELF45AWD	3,000	45	4,140	92	1,510	85 Ra	Over 0.95
ELF45ADD	5,800	45	4,275	95	1,610	85 Ra	Over 0.95

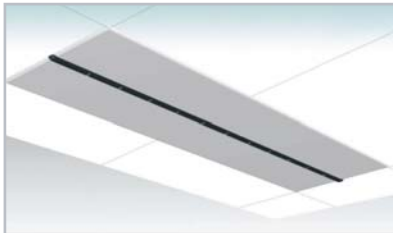

(Unit:mm)

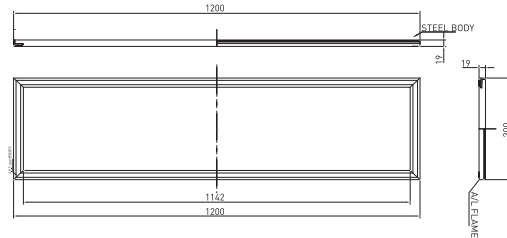

- Input Voltage : AC 90~240V, 50/60Hz
- Size 1200x300
- Operating Temp. : -20 ~ +50°C

Model	CCT(K)	Power(W)	Flux(lm)	Efficiency (lm/W)	Illuminance (lux@1m)	CRI	Power Factor
ELF50AWR	3,000	50	3,900	78	1,460	75 Ra	Over 0.95
ELF50ADR	5,800	50	4,000	80	1,550	75 Ra	Over 0.95
ELF45AWR	3,000	45	4,140	92	1,540	85 Ra	Over 0.95
ELF45ADR	5,800	45	4,275	95	1,640	85 Ra	Over 0.95

- Input Voltage : AC 90~240V, 50/60Hz
- Size : 600 x 600mm
- Operating Temp. : -20 ~ +50°C

